

Quad BRI



ATLAS 550 User Module

Product Features

- Four basic rate ISDN U-Interfaces
- LT mode and NT mode support
- ANSI T1.601 compliant
- Compliant with Lucent 5ESS, Nortel DMS100, and National ISDN
- Near-end and far-end block error monitoring
- Maximum distance of 18,000 ft
- Flash upgradable
- Occupies a single user slot in the ATLAS 550 chassis
- Hot swappable
- Standard 5-year warranty


ATLAS™ includes an advanced access architecture for switching dial-up calls to specific ports or DS0s. The Quad Basic Rate ISDN (BRI) Module contains four ISDN U-Interfaces and combines with other ATLAS 550 components to implement an ISDN access switch. The Quad BRI Module can connect to the ISDN network (NT mode), or it can emulate the ISDN network to other ISDN access devices (LT mode) that support the U-Interface, such as terminal adapters and network termination units.

As a component in an ATLAS 550 access switching application, the Quad BRI Module can consolidate multiple Basic Rate ISDN (BRI) connections onto T1/PRI access lines. The module also supports BRI-to-BRI, BRI-to-PRI, and PRI-to-PRI switching. In addition, the ATLAS 550 can convert between ISDN D channel (PRI or BRI) and T1 robbed bit

signaling, allowing non-ISDN equipment to access a more efficient PRI or BRI facility. Moreover, the module's call filtering feature allows you to program on a per-user basis, the call types that will be answered and originated.

The Quad BRI module can be configured through a variety of mechanisms, including Telnet or VT100 emulation. SNMP management is supported for alarm and event reporting.

The Quad BRI Module includes an extensive array of diagnostic tools to assist in identifying and correcting network problems including a built-in self-test utility, local and remote loopback testing for B1, B2, and 2B+D, and performance monitoring to ensure the quality of the ISDN line.

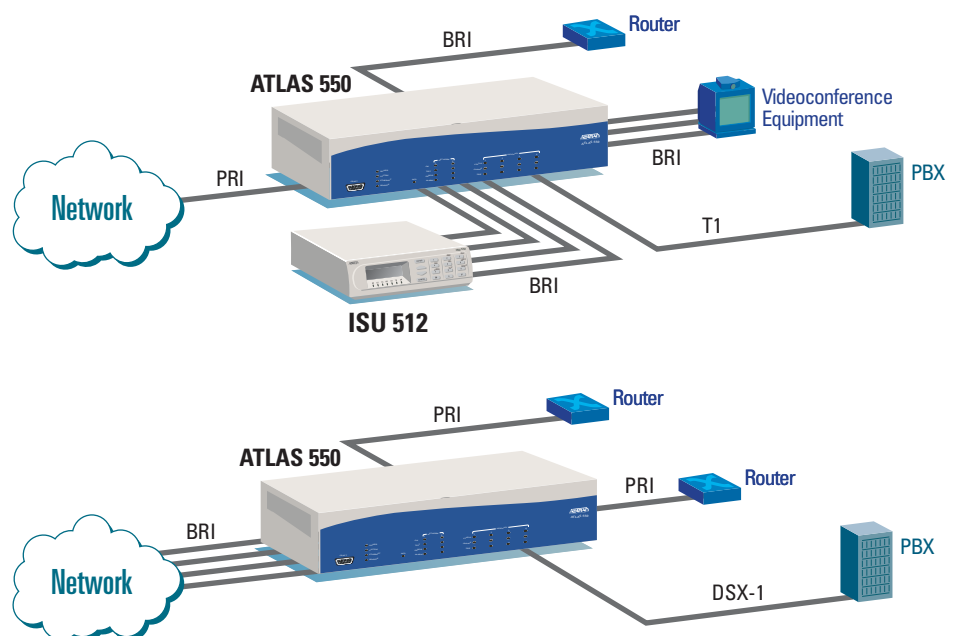



ADTRAN, Inc.

Attn: Enterprise Networks
901 Explorer Boulevard
Huntsville, AL 35806

P.O. Box 140000
Huntsville, AL 35814-4000

256 963-8000 voice
256 963-8699 fax
256 963-8200 fax back

General Information
800 9ADTRAN
info@adtran.com
www.adtran.com

**Pre-Sales
Technical Support**
800 615-1176 toll-free
application.engineer@adtran.com
www.adtran.com/support

Where to Buy
877 280-8416 toll-free
channel.sales@adtran.com
www.adtran.com/where2buy

**Post-Sales
Technical Support**
888 423-8726
support@adtran.com
www.adtran.com/support

**ACES Installation &
Maintenance Service**
888 874-ACES
aces@adtran.com
www.adtran.com/support

International Inquiries
256 963 8000 voice
256 963-6300 fax
international@adtran.com
www.adtran.com/international

**For the regional office
nearest you, visit:**
www.adtran.com/where2buy



I.S. EN ISO 9001
ADTRAN is a
ISO 9001 registered company.



TL 9000
ADTRAN is a
TL 9000 registered company.

Printed in the U.S.A.
61200315L1-8C March 2003
Copyright © 2003 ADTRAN, Inc.
All rights reserved.

Quad BRI

ATLAS 550 User Module

Product Specifications

ISDN Interface

- ANSI T1.601-1992 2B1Q U-Interface

Physical Interface

- 8-Pin Modular RJ-45

BRI Line Rate

- 2B+D, 160 Kbps full duplex

U-Interface Distance

- 18,000 ft

Switch Compatibility

- Lucent 5ESS
- Nortel DMS-100
- National ISDN

Termination Modes

- LT (Network Emulation)
- NT (DCE)

Diagnostics

- Self-test
- B1, B2, & 2B+D Local and Remote Loopbacks

Performance Monitoring

- Near-End Block Errors (NEBES), & Far-End Block Errors (FEBES)

Agency Approvals

- FCC Part 15, Class A, FCC Part 68, UL, Canadian UL (CUL), Industry Canada CS-03

Environment

- Operating Temperature: 0° to 45°C, (32° to 113°F)
- Storage Temperature: -20° to 70°C, (-4° to 158°F)
- Relative Humidity: Up to 95%, non-condensing

Power

- 2.0 watts

Product Includes

- Four RJ-45 to RJ-11 cables (7 ft) and user manual
- Quick Start Guide

Ordering Information

Equipment	Part #
Quad BRI Module	1200315L1



Specifications subject to change without notice. ADTRAN and ATLAS are trademarks of ADTRAN, Inc. All registered trademarks and trademarks mentioned in this publication are the property of their respective owners.