

Rack PDU


Overview

The American Power Conversion (APC[®]) Rack Power Distribution Unit (PDU) distributes power to devices in the rack.

Outlets. The PDU has fourteen (14) NEMA 5-15R outlets.

Power cord. The 12-foot (3.66-meter) power cord terminates with a NEMA 5-15P plug.

AP9567

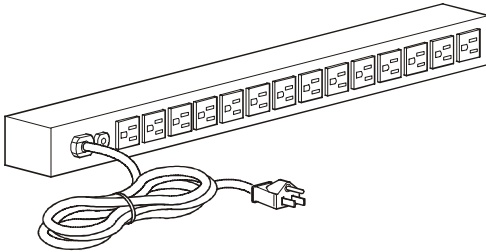

Specifications for AP9567

Electrical

Input connector	NEMA 5-15P plug
Output connectors	(14) NEMA 5-15R outlets
Nominal input voltage	100–120 VAC
Acceptable input voltage	± 10% of nominal voltage
Input frequency	50/60 Hz

Physical

Dimensions (H × W × D)	24.40 × 1.75 × 1.75 in (61.97 × 4.44 × 4.44 cm)
Shipping dimensions (H × W × D)	25.13 × 6.63 × 5.75 in (63.81 × 16.82 × 14.60 cm)
Weight	4.82 lb (2.19 kg)
Shipping weight	6.40 lb (2.90 kg)

Environmental

Elevation (above MSL)	
Operating	0 – 10,000 ft (0 – 3000 m)
Storage	0 – 50,000 ft (0 – 15 000 m)
Temperature	
Operating	32 to 113° F (0 to 45° C)
Storage	–13 to 149° F (–25 to 65° C)
Humidity	
Operating	5 – 95% RH non-condensing
Storage	5 – 95% RH non-condensing

Compliance

Safety verification	UL/cUL Recognized, UL 1363, CAN/C22.2 No. 21-M90
---------------------	--

