


# PortServer® TS 8/16

Terminal Server

PortServer TS 8 and PortServer TS 16 deliver reliable and cost-effective EIA-232/422/485 serial-to-Ethernet connectivity, with a robust feature set for efficient device management.

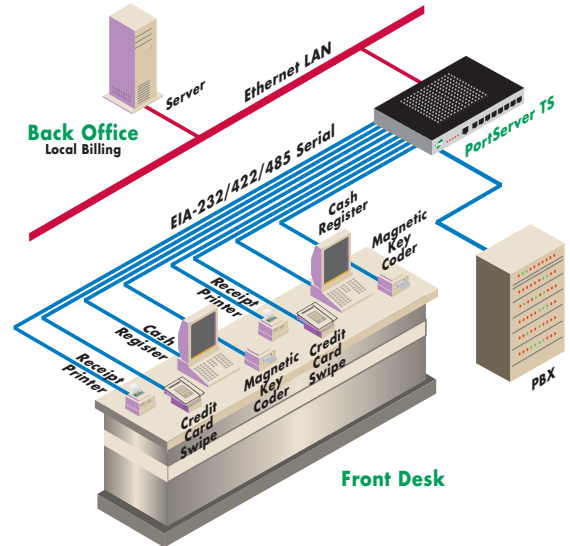

## Features/Benefits

- > Cost-effective eight- or 16-port EIA-232/422/485 serial-to-network connectivity
- > SSH v2 ensures encrypted connections
- > Digi RealPort® technology provides local serial port functionality
- > RealPort with encryption provides SSL-based protection for additional security
- > Ports may be shared between multiple hosts running different operating systems
- > Supports SNMP for easy network management
- > Supports RADIUS authentication and accounting
- > NEBS Level III certified in a system

## Overview

The PortServer TS family of terminal servers delivers intelligent, reliable and cost-effective EIA-232/422/485 serial-to-Ethernet connectivity. PortServer TS 8 (eight serial ports) and PortServer TS 16 (16 serial ports) support data center console port management applications, as well as property management, point-of-sale, data acquisition, industrial automation, power utilities, travel reservations and other applications requiring serial-to-IP connectivity.

PortServer TS solutions offer the most robust feature set on the market. Digi's patented RealPort® technology makes it possible to establish a connection between the host and a networked serial device by creating a local COM or TTY port on the host computer, allowing existing software applications to work without modification. Incoming/outgoing Rlogin and Telnet sessions on each port give equipment and system administrators a high level of control over networked serial devices. Other features include Secure Shell (SSH v2) encryption to protect against unauthorized network monitoring or "sniffing," and port buffering, which allows network administrators to easily capture vital information for troubleshooting.

A variety of management tools are supplied with the Digi PortServer TS product family, including Digi Port Authority-Remote and the embedded Digi web management console. Functions including IP assignment, diagnostics and guided configuration make the product easy to install and use.

Digi International, the leader in Connectware, makes device networking easy by developing products and technologies that are cost-effective and easy to use. With over 20 million ports shipped worldwide, Digi has been offering the highest levels of performance, flexibility, and quality since 1985.



Connectware™

# Features/Specifications

## FEATURES

### PortServer TS 8/16

- Connects to 10/100 Mbps Ethernet LAN
- EIA-232 serial ports
- DHCP, RARP and ARP-Ping for easy IP address assignment
- HTTP for easy browser configuration
- Telnet, Reverse Telnet, Rlogin and auto-connect
- Up to nine Telnet or Rlogin sessions per port
- TCP and UDP Socket support
- Password access
- PPP (PAP & CHAP)
- Line Printer Daemon (LPD)
- SNMP (read and write)
- DPA-Remote for easy monitoring
- Easy firmware upgrades via TFTP
- Save/Restore configuration to host
- Surge protection on all ports
- 230 Kbps throughput on all ports
- Full modem and hardware flow control
- LEDs for serial and Ethernet activity
- RADIUS
- SSH v2 feature available on all ports simultaneously
- Port buffering up to 64 Kbps per port
- 19" mounting brackets for PortServer TS 16 AC rack
- 19" and 23" mounting brackets for PortServer TS 16 DC rack

### PortServer TS 8/16 MEI

- Software selectable EIA-232/422/485 serial ports
- Includes 19" rack-mounting brackets

## OPERATING SYSTEMS

- AIX
- HP-UX
- Linux
- Microsoft® Windows® XP, Windows 2000, Windows Server™ 2003, Windows 98, Windows ME, Windows NT®,
- NCR UNIX MP-RAS
- SCO® OpenServer™
- SCO UnixWare™
- Solaris™ (Intel)
- Solaris (SPARC)



## DIMENSIONS

### PortServer TS 8

- Length: 8.3 in (21.08 cm)
- Width: 3.7 in (9.4 cm)
- Depth: 1.0 in (2.54 cm)
- Weight: 3.05 lbs (1.39 kg)

### PortServer TS 16

- Length: 13.4 in (34.04 cm)
- Width: 6.6 in (16.76 cm)
- Depth: 1.4 in (3.6 cm)
- Weight: 5.3 lbs (2.4 kg)

### PortServer TS 16 Rack, PortServer TS 8/16 MEI

- Length: 16.8 in (42.7 cm)
- Width: 6.6 in (16.76 cm)
- Depth: 1.6 in (4.06 cm)
- Weight: 7.05 lbs (3.2 kg)

## REALPORT SOFTWARE

- Local emulation of UNIX TTY and Microsoft COM ports
- Transparent printing under UNIX
- Single TCP/IP connection per PortServer reduces Ethernet traffic and minimizes host CPU utilization
- RealPort with encryption available for added security

## REGULATORY APPROVALS

### PortServer TS 8, PortServer TS 8/16 MEI

- FCC Part 15, Subpart B, Class A
- EN55022, Class A
- EN55024
- EN61000-3-2,3
- UL60950
- CAN/CSA C22.2 No.60950
- EN60950

### PortServer TS 16

- FCC Part 15, Subpart B, Class B
- EN55022, Class B
- EN55024
- EN61000-3-2,3
- UL60950
- CAN/CSA C22.2 No.60950
- EN60950

## POWER REQUIREMENTS

### PortServer TS 8

- External, 100 - 240 VAC, 50/60 Hz, 6W typ.

### PortServer TS 16 desktop and rack, PortServer TS 16 MEI

- Internal, 100 - 250 VAC, 50/60 Hz, 12W typ.

### PortServer TS 16 48Vdc

- Internal 36-72Vdc, 12 W typ.

### PortServer TS 8 48Vdc

- External 36-72Vdc, 6 W typ.

## ENVIRONMENTAL

- Ambient temperature: 0°C to 55°C (32°F to 130°F)
- Relative humidity: 5% to 95% (non-condensing)

## MODEL.....PART NUMBERS

Model	North America	International
PortServer TS 8	70001734	70001741
PortServer TS 8, 48 Vdc	70001885	70001885
PortServer TS 16	70001733	70001738
PortServer TS 16 Rack	70001742	70001743
PortServer TS 16 Rack, 48 Vdc	70001747	70001747
PortServer TS 8 MEI	70001979	70001981
PortServer TS 16 MEI	70001978	70001980
6' cable RJ-45 to RJ-45 for Sun Netra/Cisco bundle of 16	76000631	76000631

See <http://www.digi.com> for additional cable converters.

## DIGI PORT AUTHORITY-REMOTE

- Remote monitoring application
- Ports status
- Ethernet status

## DIGI SERVICE AND SUPPORT

You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. <http://support.digi.com>

### Digi International

11001 Bren Road E.  
 Minnetonka, MN 55343 USA  
 PH: 877-912-3444  
 952-912-3444  
 FX: 952-912-4952  
 Email: [info@digi.com](mailto:info@digi.com)  
[www.digi.com](http://www.digi.com)

### Digi International GmbH

Joseph-von-Fraunhofer Str. 23  
 D-44227 Dortmund  
 Germany  
 PH: +49-231-9747-0  
 FX: +49-231-9747-111  
[www.digi.de](http://www.digi.de)

### Digi International (HK) Limited

Suite 1703-05, 17/F.  
 K Wah Centre  
 191 Java Road  
 North Point, Hong Kong  
 PH: +852-2833-1008  
 FX: +852-2572-9989  
[www.digi.cn](http://www.digi.cn)

[www.digi.com](http://www.digi.com)

email:  
[info@digi.com](mailto:info@digi.com)



© 1999-2004 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, the Digi Connectware logo, PortServer, and RealPort are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries. All other trademarks are the property of their respective holders.

91000912  
 B1/304

Connectware™