

ULTRALINX 66 BLOCK PROTECTORS


VOICE / HIGH-SPEED DATA PROTECTION

INNOVATIVE TECHNOLOGY FROM ITW LINX!

Protect sensitive electronics in voice and data communication systems from damage caused by transient voltages with 100% solid-state over-voltage protection. Current surge protection is provided through sneak current fuses or self-resetting PTC's.

Features:

- **66 Block Connectivity**—Fits all 66 Type M Blocks
- **Dual Indicator Lights**—Protection OK and Ground Connection OK
- **Solid-state Protection**—Provides the fastest response to transient voltages (2–5 nanoseconds) by quickly diverting damaging surges to ground and resetting.
- **Single Pair Protection**—Scale the protection to the system size. Protect only the lines requiring protection.
- **Lifetime Product Warranty**—For up-to-date warranty information visit: itwlinx.com
- **Cost Savings**—Eliminate expensive five-pin blocks while using economical 66 Blocks.
- **Streamlined Installation**—Eliminate redundant cross-connects by adding protection directly at the 66 Block. Press fit protectors to the the block attaching the ground bar MGB-1 to the protectors. A Screw Ground Lug (SGL-1) is required.
- **Optimum Protection**—Available in a number of voltage ratings to match system operating voltages.
- **Ideal for Retrofit Applications**—just remove the bridging clips from the block and replace them with the UltraLinx Protector, add the ground connection and the pair is protected!
- **Sneak Current Protection**—Protects against fires caused by overloads and power crosses.

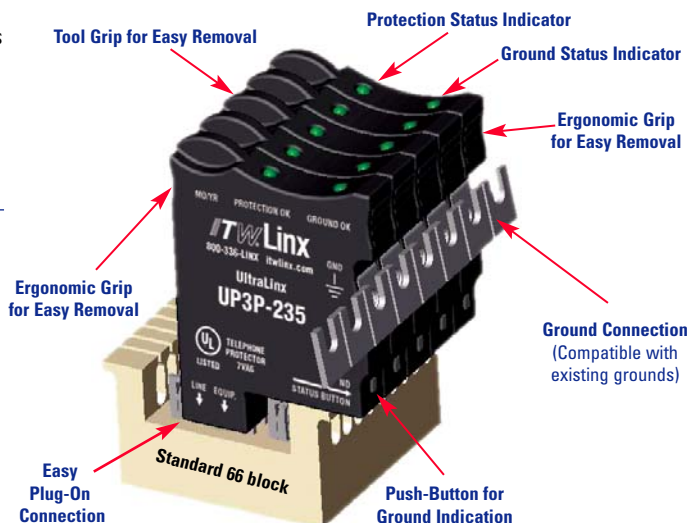

SPECIFICATIONS

- **UP3B** version is UL Listed as both Primary and Secondary Protector with 350 mA fuse.
- **UP3H, UP3P** are UL Listed as Secondary Protectors and contain self-resetting PTC's to eliminate service calls.
- **UP3H** version is designed specifically to protect high speed T1, xDSL data lines without harming the transmission integrity.

Product Selection

Part Numbers	Solid State	Fuse Rating	Primary	Secondary	Dimensions L" × W" × D"	Application
UP3B	✓	350 mA	✓	✓	2.62 × 1.88 × 0.38	Voice / Fax
UP3H	✓	160 mA	—	✓	2.62 × 1.88 × 0.38	T1 / xDSL / ISDN
UP3P	✓	160 mA	—	✓	2.62 × 1.88 × 0.38	Voice / Fax

Designs and specifications subject to change without notice due to product improvement

Ordering Information:

UltraLinx Part Numbers for use on 66 Blocks

Maximum Operating Voltage (Includes AC & DC voltage)	Clamping Voltage	Voice / Fax / Modem Lines 350 mA Fuses	Voice / Fax / Modem Lines 160 mA PTC	T1 / E1 xDSL / ISDN / LAN 160 mA PTC
0–26.9 Volts	27	UP3B-27	UP3P-27	UP3H-27
27.0–35.0 Volts	39	UP3B-39	UP3P-39	UP3H-39
35.1–60.0 Volts	75	UP3B-75	UP3P-75	UP3H-75
200 Volts Peak	235	UP3B-235	UP3P-235	UP3H-235